

# Technical Bulletin

## Alpina EasyWeiss

**Especially easy to paint on!**

Snow white interior colour with increased coverage · matt · wash-resistant non-drip · water soluble

### Material

#### Purpose:

For high-quality wall and ceiling coatings on all standard substrates. The ideal solution for new and redecoration coatings.

#### Properties:

Snow white, water soluble, odour-free and eco-friendly, wash-resistant, diffusable.

High coverage so that one coat is usually enough. Very easy to apply.

#### Quality to DIN EN 13 300

<b>Coverage:</b> with a productivity of approx. 6 m <sup>2</sup> /l.	<b>Class 2</b>
<b>Wet abrasion resistance:</b> wash-resistant to DIN 53 778	<b>Class 3</b>
<b>Gloss level:</b>	<b>matt</b>

#### Product declaration to VdL-RL01:

Content: Polyvinyl acetate dispersion, titanium dioxide, calcium carbonate, water, additives, preservatives.

Contains methyl isothiazolinone, benzisothiazolinone.

#### Additional information:

Alpina Hotline Tel. No.  
+49(0)1805 123888 (€ 0.14/min. from a Deutsche Telekom landline, different tariff for calls from mobile phones).

#### Bonding agent:

Resin dispersion to DIN 55 945.

#### Shade:

white/matt.

Can be tinted using the Alpina Color-Stick or Alpina Color in the Tube.

#### Safety advice:

Keep out of the reach of children.

Do not inhale spray dust or spray mist. Ensure adequate ventilation during application and drying. Avoid eating, drinking and smoke while using the paint. In case of contact with the eyes or skin, rinse immediately with plenty of water.

Do not allow the product to enter sewerage networks, watercourses or ground soil.

#### Produce code for paints and lacquer:

M-DF01

#### Storage:

Cool but frost-free.


#### Disposal:

Pass only completely empty drums for recycling. Liquid material remnants can be disposed of as water-based waste paint. Dried material remnants can be disposed of as hardened paints or as domestic waste.



**Reports:** Alpina EasyWeiss carries the TÜV-rating symbol for being "non-toxic".

The instructed Fraunhofer Wilhelm-Klauditz Institute confirms (extract): Alpina EasyWeiss is recommended for use indoors. The painter and room user are not expected to experience adverse effects if the product is applied as specified.

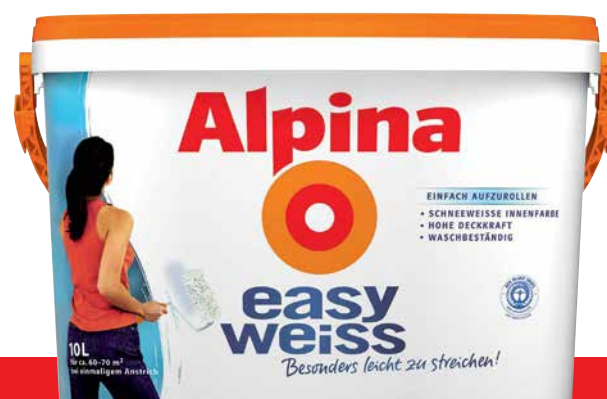

**Pack sizes:** 2.5 litre, 5 litre and 10 litre

### Surface coating system:

A deep, consistent coating with max. 5% water.

A primer coat of Alpina EasyWeiss diluted with max. 10% water is to be applied first to high-contrast surfaces and surfaces with a high or varying degree of absorbency.

### Application:

Brush, roll or spray.

Clean the implements immediately after use with soap and water.

### Usage:

Approx. 155 ml/m<sup>2</sup> per coat on a smooth surface. More on a rough surface as required.

### Lower temperature limit during application:

+5 °C for surface and ambient air.

### Drying time:

Surface-dry at +20 °C and 65% rel. humidity after 4–6 hours.

Paintable after 12 hours. Hard-dry and resilient after approx. 3 days.

These times are longer at lower temperatures and higher humidities.

### Surfaces must be free of impurities and parting agents and must be dry.

#### Mineral mortar:

Paint solid, average absorbency mortar without pre-treatment.

Apply solvent-free lay of Alpina Tiefgrund LF to porous, crumbling and absorbent mortar.

Roughen and remove dust from gypseous, smooth ready-mixed mortar and apply a solvent-based primer.

#### Gypsum plasterboard:

Sand off trowel burr.

Apply solvent-free Alpina Tiefgrund LF.

#### Concrete:

Remove any parting agent residues with a degreasing household detergent and brush off floury, crumbling substances.

#### Lime sand brick and exposed brickwork:

Paint without pre-treatment.

#### Stable old paint or resin mortar coatings:

Rework matt, slightly absorbent coatings directly.

Rough off glossy old coats and paint over.

#### Unstable coatings:

Mechanically remove unstable old paint or coats of resin mortar by scratching, scraping, brushing or sand off and carefully remove dust.

#### Distemper coatings:

Wash-off carefully and thoroughly.

#### Uncoated woodchip, relief or Anaglypta from paper:

Paint without pre-treatment.

#### Non-adherent wallpapers:

Remote completely. Wash-off all paste and paper waste.

#### Mildewed areas:

Mechanically remove mildew and fungus by wet-brushing, scraping or scratching off. Wash areas with a commercially available mildew cleaner and allow to dry thoroughly.

It is advisable to determine and remedy the cause of the mildew where possible.

Apply Alpina Bad- und Küchen Spezialfarbe.

#### Areas with nicotine traces:

Wash off stubborn impurities and allow to dry thoroughly.

Apply Alpina Nikotinsperre.

#### Small imperfections:

Carry out the essential preliminary work, make good with a suitable filler and prime if necessary.

### Technical Bulletin No. 2129\_EN · Status: October, 2008

This Technical Bulletin has been compiled from state-of-the-art technology and our experience. Given the numerous substrates and property conditions, however, buyers/users are not relieved of their own obligation to check our materials for their suitability for the intended purpose.

### Alpina Farben GmbH

D-64369 Ober-Ramstadt · Postfach 1220  
Alpina Hotline Tel. No. +49(0)180 5/123 888  
(€ 0.14/min. from a Deutsche Telekom landline, different tariff for calls from mobile phones)  
[www.alpina-farben.de](http://www.alpina-farben.de)